

DUNK TANK INSTRUCTIONS





TOWING


1. Be sure the chains are wrapped around the canvas arms and secured. Then slowly tilt tank back onto its wheels. Place seat in its “up” position & lock.
2. Insert hitch tongue and use both pins to secure it.
3. Attach trailer to vehicle. Put pin or bolt through hitch release lever and secure. Attach safety chain to vehicle. **NOTE: Always use the safety chain when towing.**
4. Hook up lights to tow vehicle and test turn signals and brake lights.
5. Place target, canvas & balls safely in tow vehicle.

SET UP

1. Select a level area for set up.
2. Unhook trailer and lights from tow vehicle & roll to set up area. (NOTE: Trailer and tank are one unit, **do not try to separate!**)
3. Raise tongue end of trailer and remove hitch pins from tongue bar. Slide tongue bar out and replace pins in bar.
4. Slowly lift up and set tank upright carefully.
5. Remove the transportation chains from around the arms. Drop the Bottom Canvas Arm into the horizontal position. Remove the pin securing the Top Canvas Arm from its (vertical) transportation position and put in into its horizontal position, securing it with the pin.

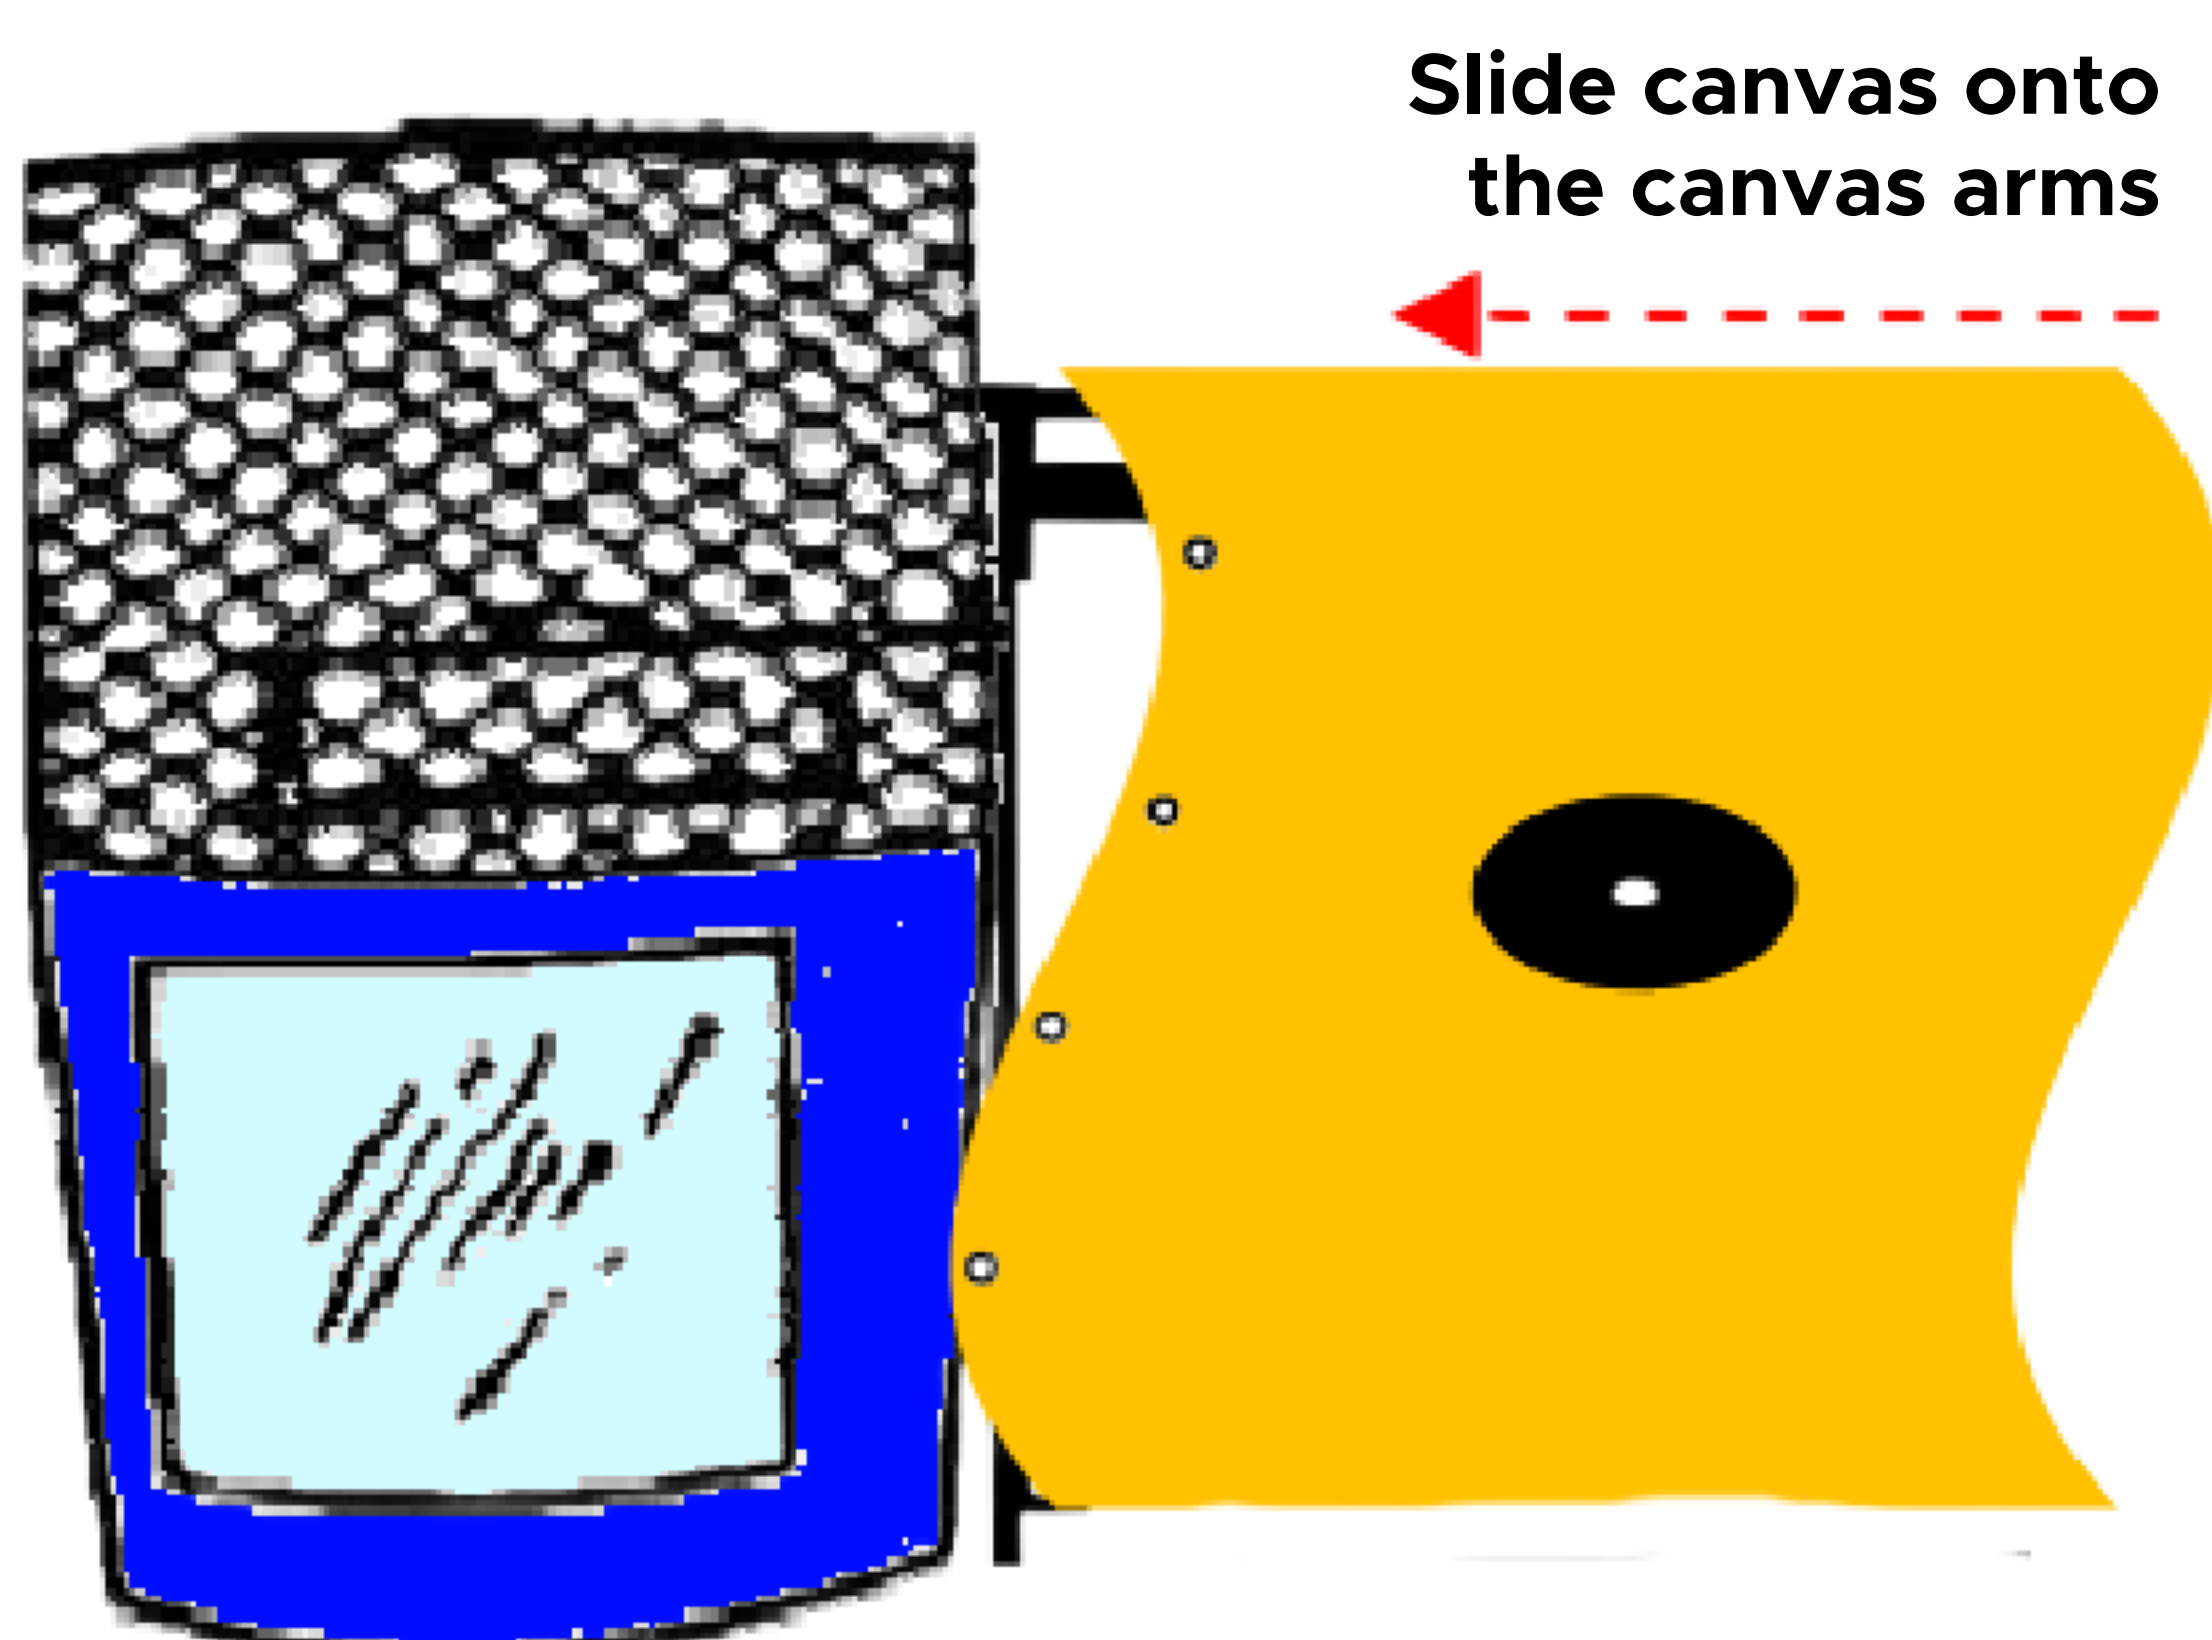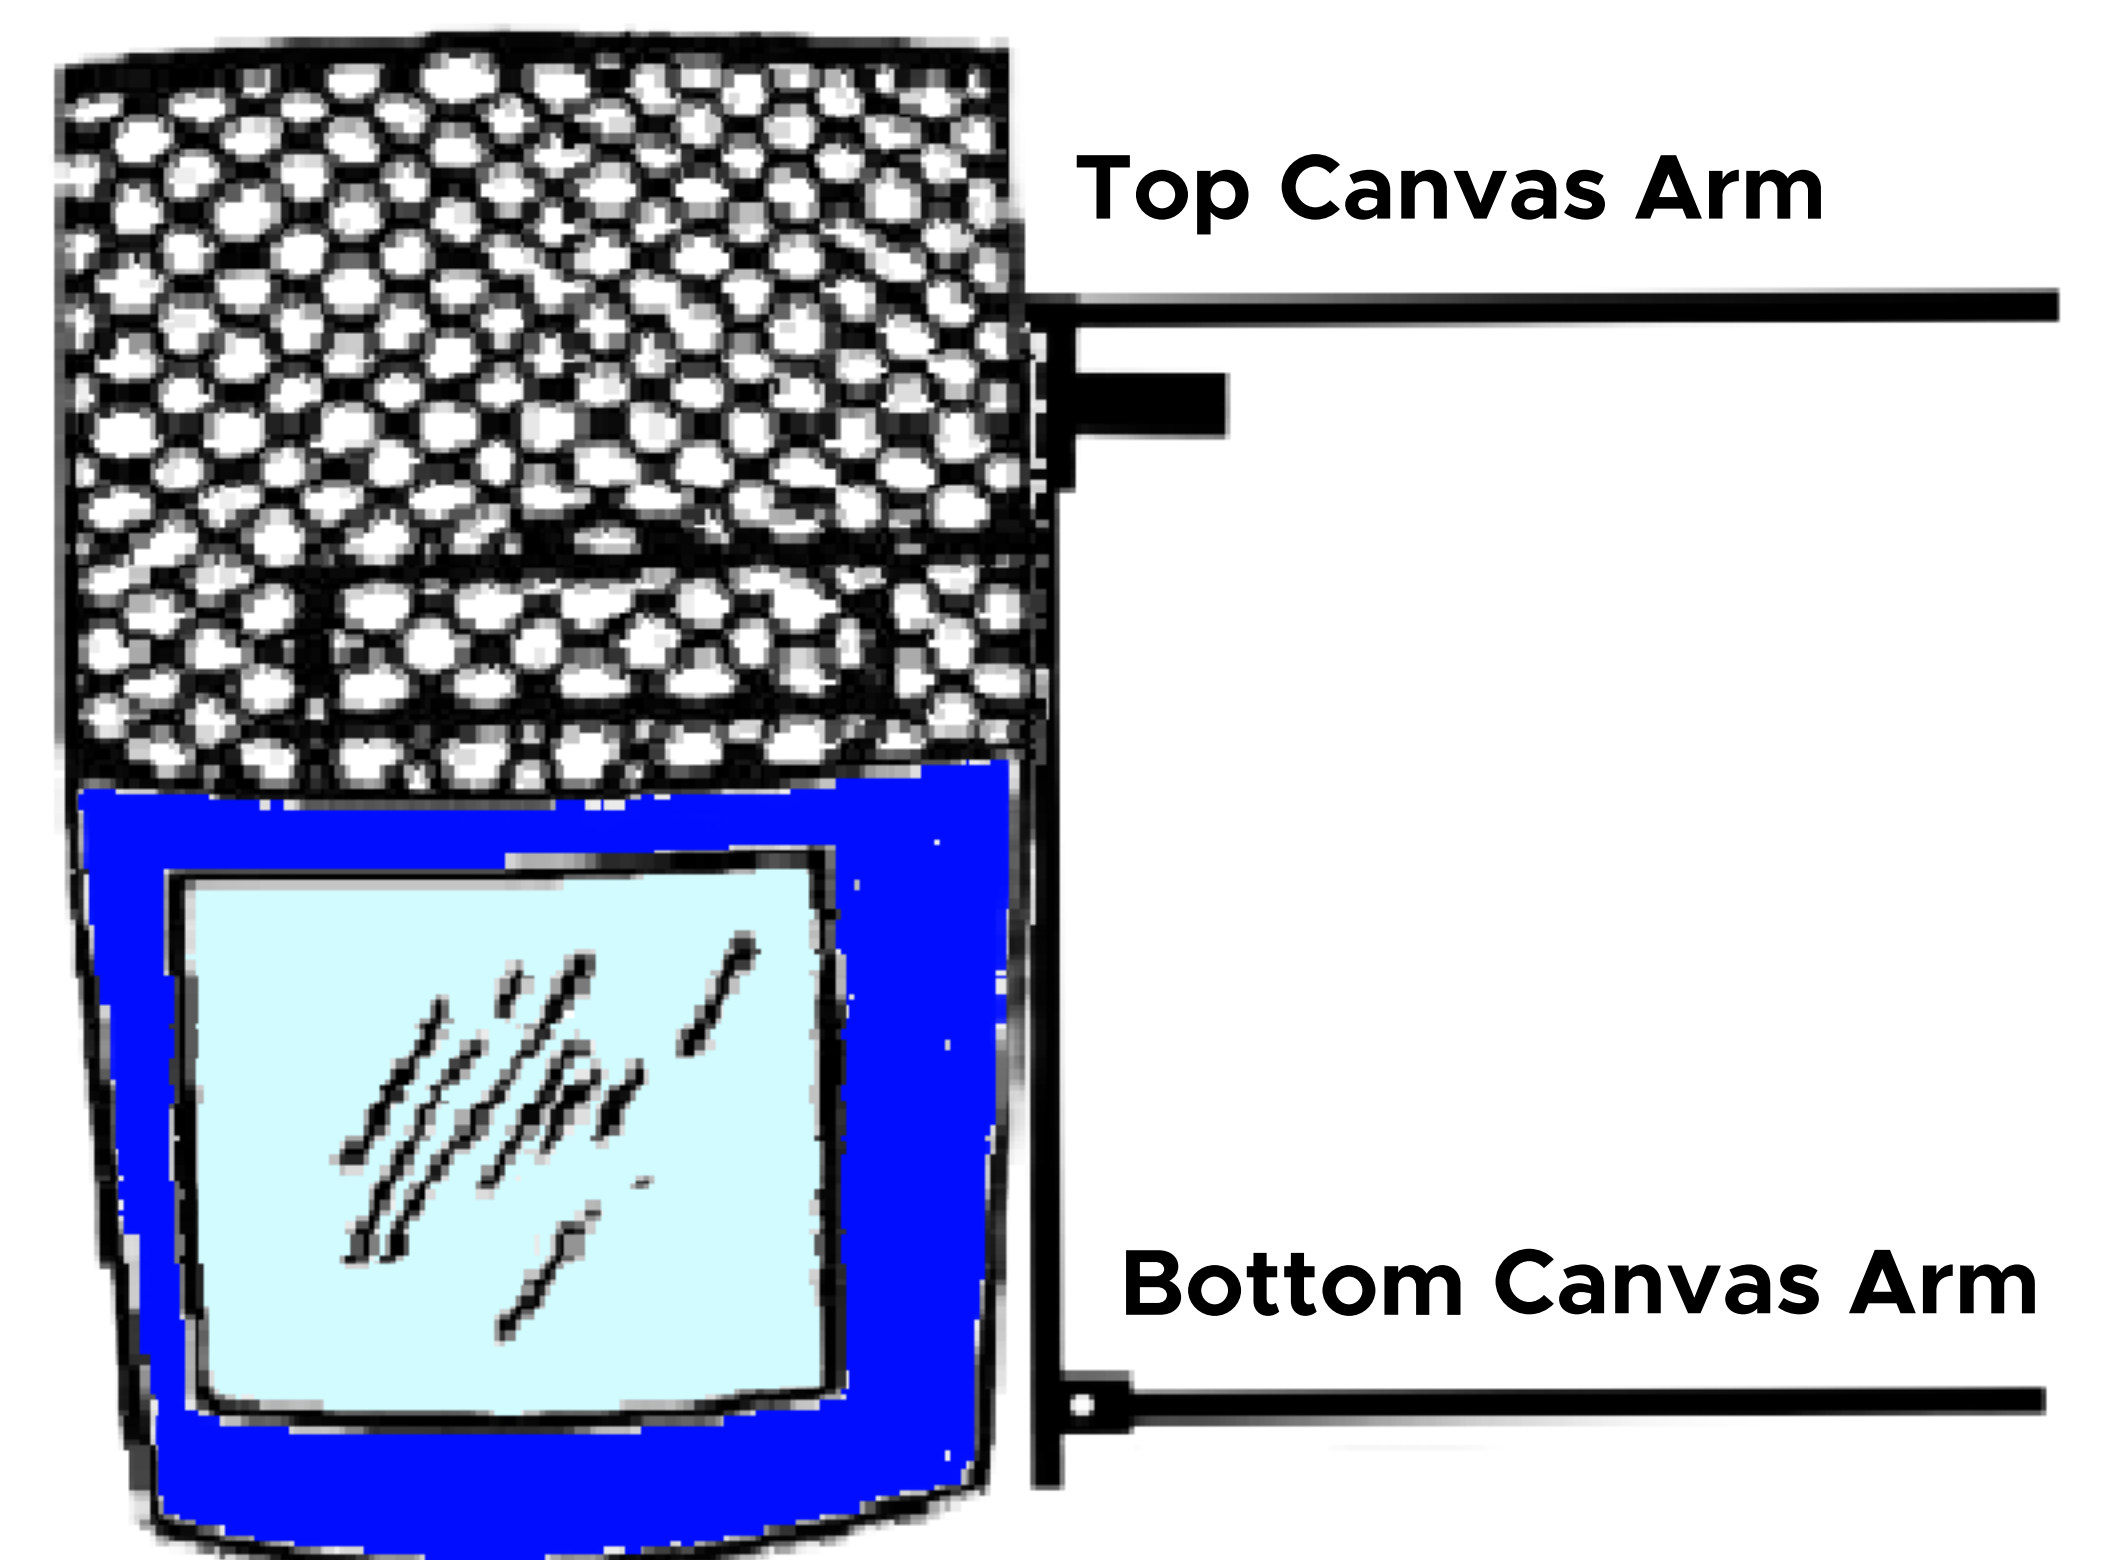

6. Slide the canvas onto the top and bottom canvas arms.
7. Extend top canvas bar to full height and use the ball bungees to secure canvas to the vertical bar.
8. Place the arm into the trigger mechanism. Put the other end through the hole in the canvas. Make sure the arm drops into the tube on the side of the frame. Insert the target into the end of the arm and screw tight.

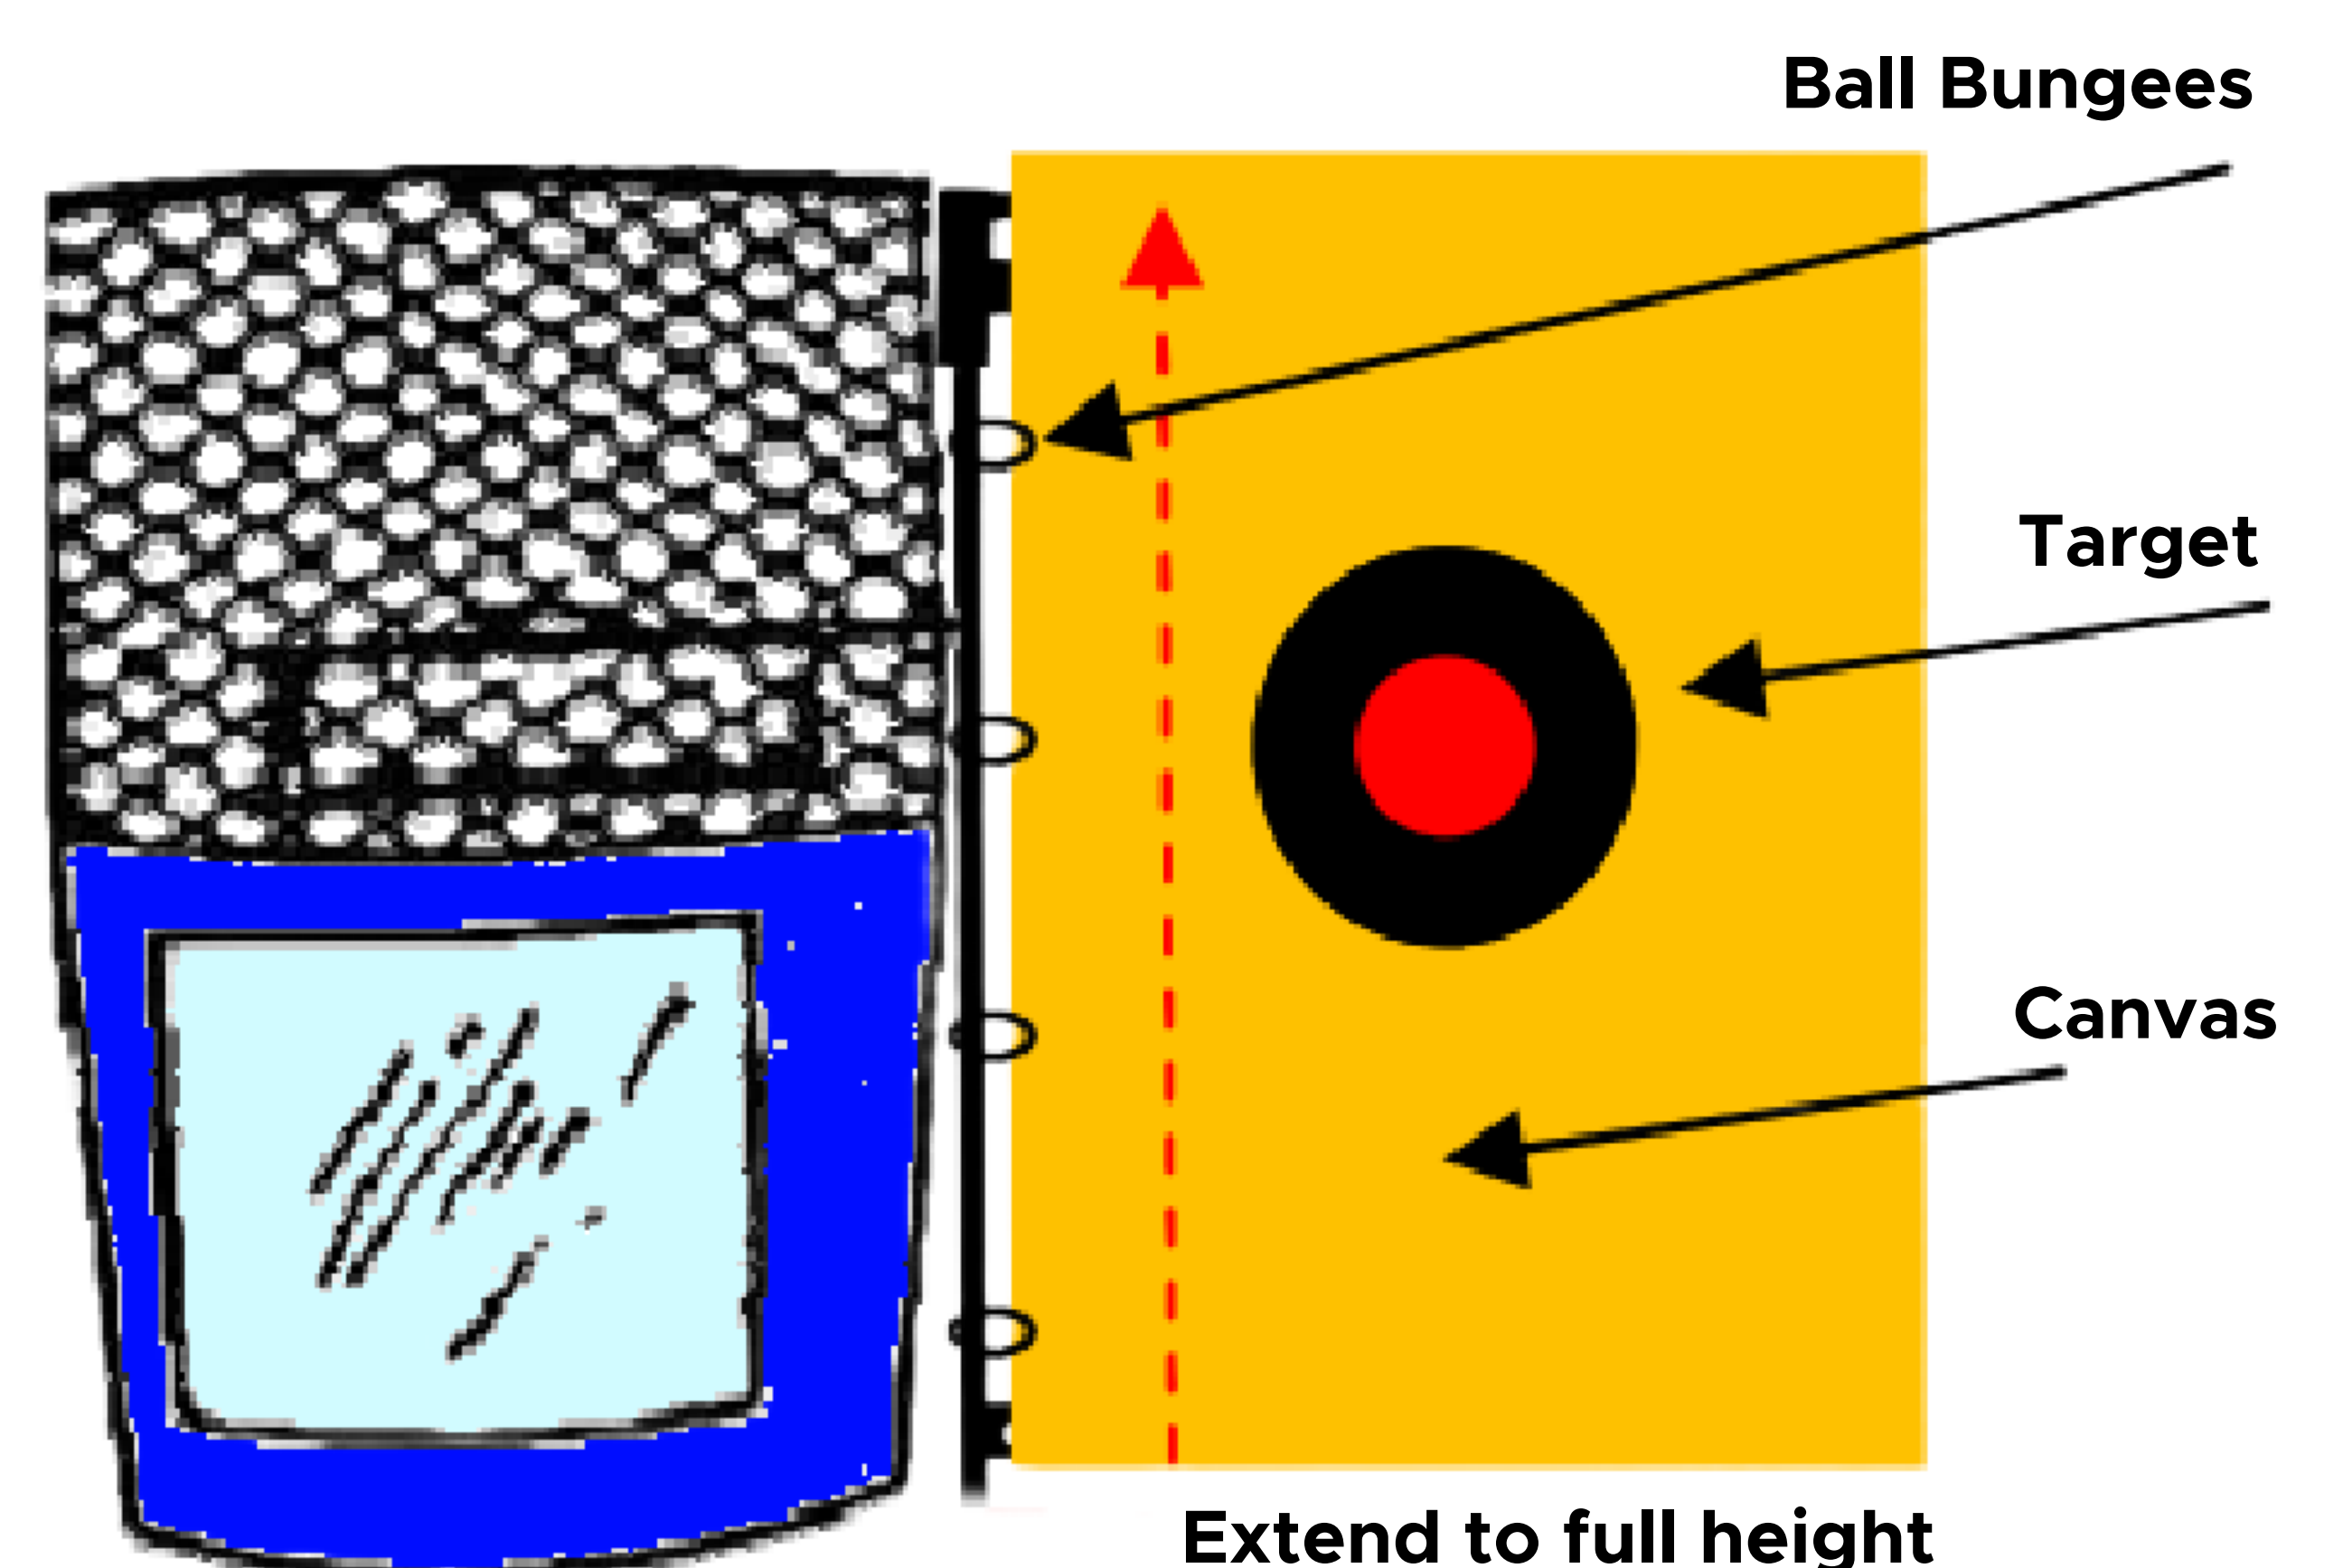

9. Place one hand on the front of the seat and push down. With the other hand test the target to see that it works properly.
10. Check drain plug to make sure it's tight and then fill tank to the top with water.

REVIEW SAFETY RULES WITH ALL PARTICIPANTS!

DUNK TANK INSTRUCTIONS



OPERATION

1. Check to see that seat is properly locked and is released when the target is pressed. Be sure to show this operation to the person who will be on the tank as they will need to know how to reset the seat and trigger mechanism each time it is released. Instruct them to use the grip handles for support when climbing up out of the tank. Also, be sure instruct the dunkee on the proper use of the seat safety latch, which is located behind the seat, to keep it secure until they are ready to be dunked.

Please remind the dunkee to keep their hands on their knees & sit forward on the seat.

2. Use ONLY the balls that came with the EASY DUNKER.

3. Monitor water level to keep it full.

TAKE DOWN

1. Open the drain (turn white knob ONLY) and let the tank empty.

2. Remove target and target arm. Stow the target arm on the side of the frame, inserting the pin into the tube. Secure with a cotter pin.

3. Remove the pin, carefully lower the top canvas arm & remove canvas.

4. Lift the bottom canvas arm and rotate the top canvas arm into its (vertical) transport position and secure with pin. Be sure both top and bottom chains are wrapped around the canvas arms and the target arm. Then slowly tilt tank back onto its wheels.

5. Place seat in its “up” position & lock.

6. Insert hitch tongue and use both pins to secure it.

7. Attach trailer to vehicle. Put pin or bolt through hitch release lever and secure. Attach safety chain to vehicle.

8. Hook up lights to tow vehicle and test the turn signals & brake lights before towing.

9. Place target, canvas and balls safely in tow vehicle.

