


CANOPY INSTRUCTIONS



CANOPY PARTS LIST

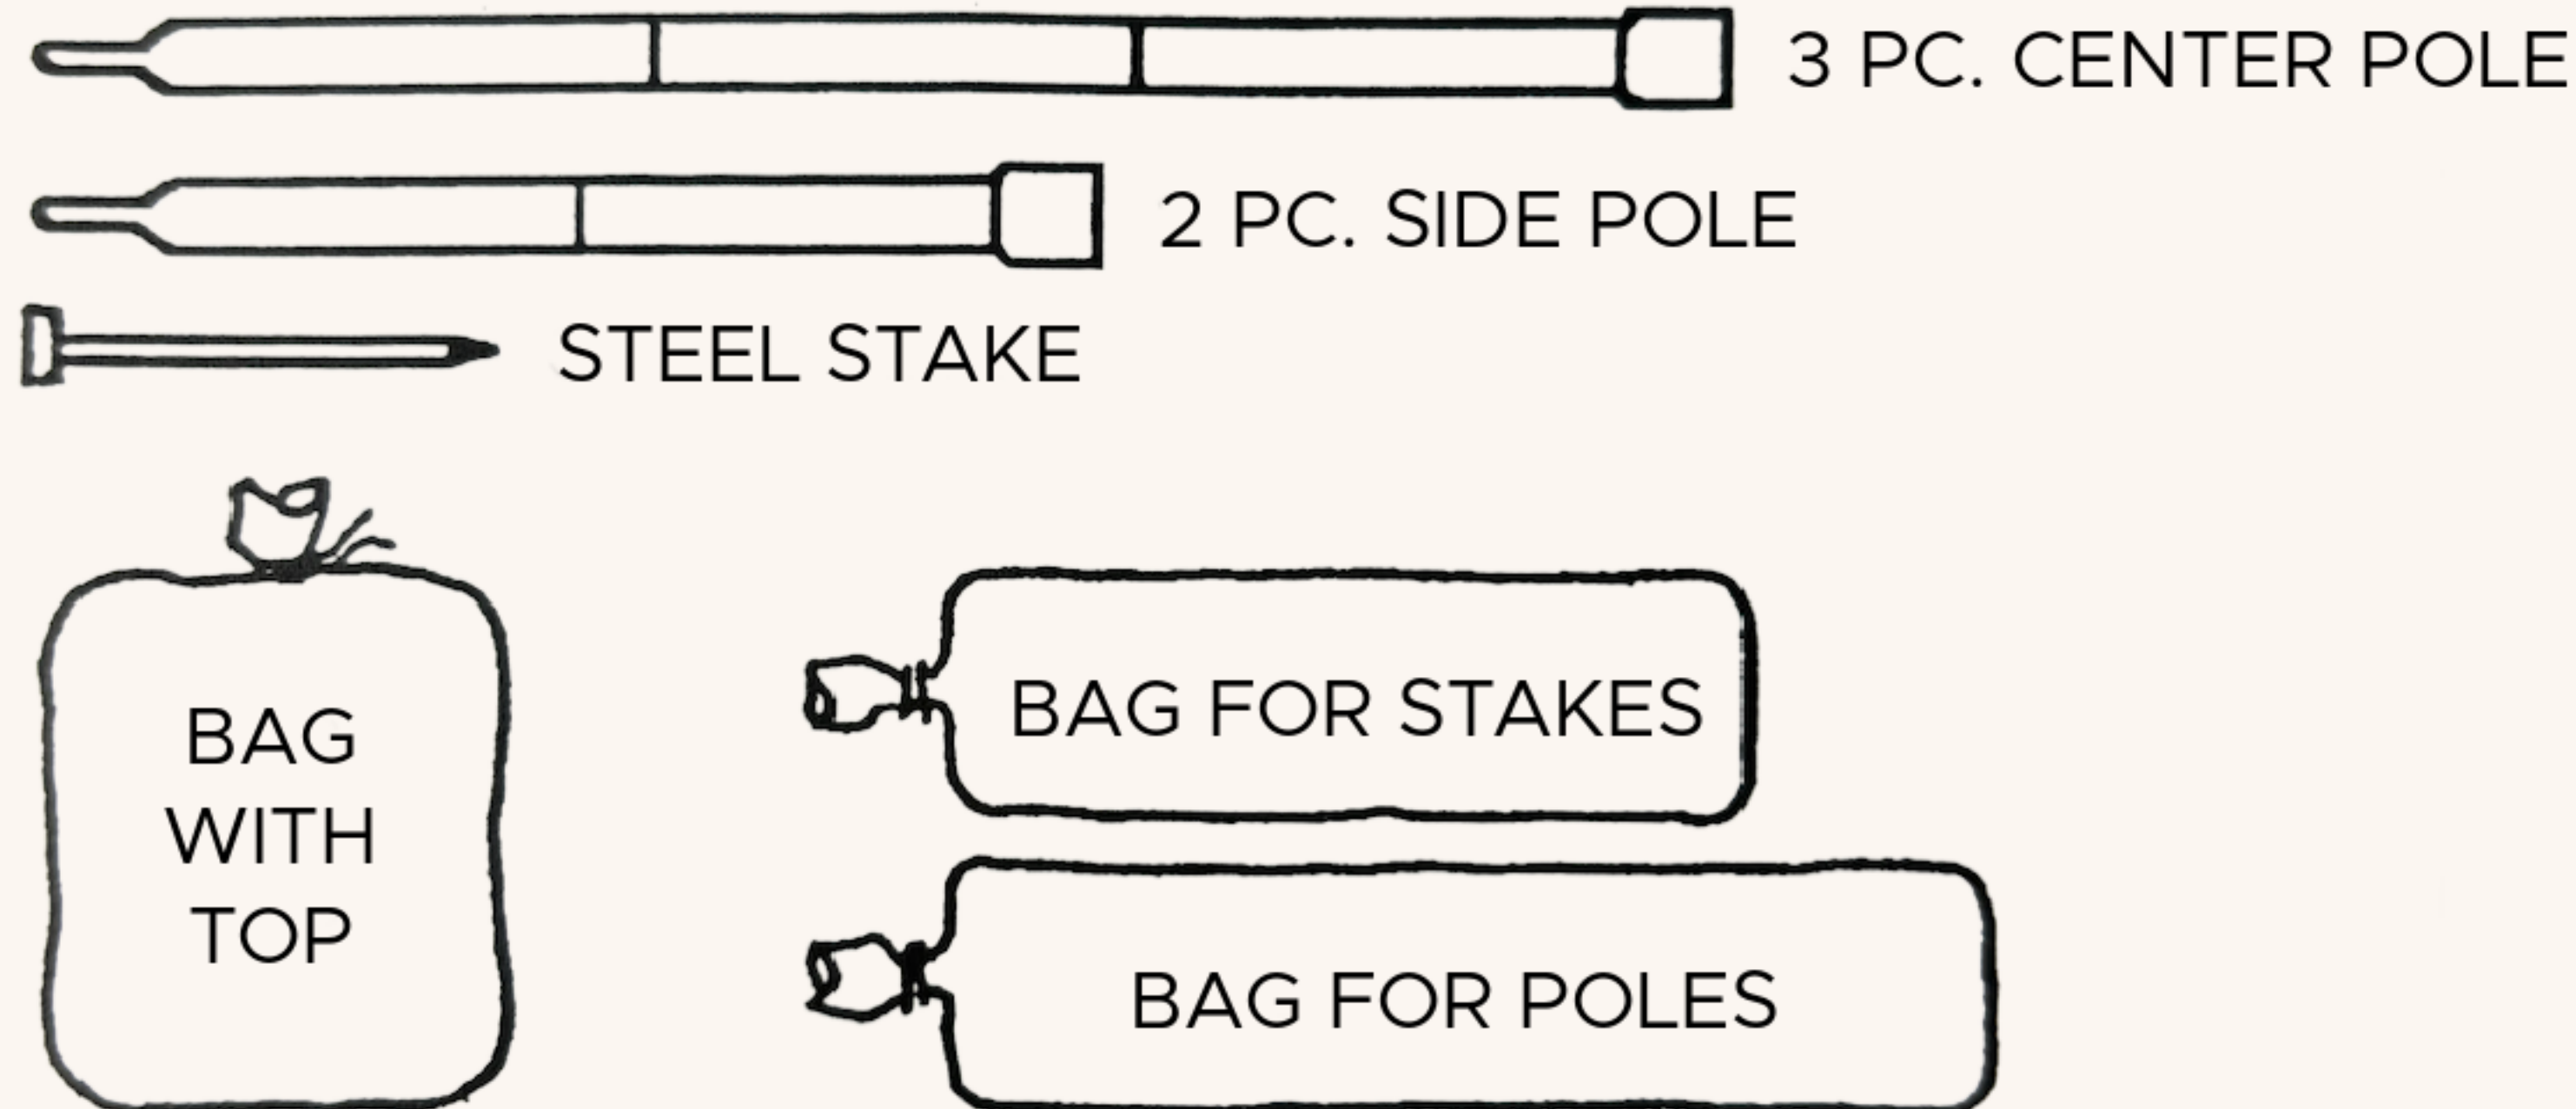

PARTS	CANOPY SIZE		
	10X10	20X20	20X30
SIDE POLE	4	8	10
CENTER POLE	1	1	2
STAKES	8	12	14
BAG W TOP	1	1	1
BAG FOR POLES	1	1	1
BAG FOR STAKES	1	1	1

Manpower Required

Two installers should be able to assemble a canopy in approximately 30 minutes.

Tools Required

Sledgehammer

Inspect Site Caution

Consult local utility company prior to installation. Prior to assembly, be sure to look around tent location for obstacles, tree roots, pipes, electrical wires.

Layout & Check

Use parts list for a quick identification and check list for proper quantities.

1 LAYOUT AT SITE

(20' x 20' canopy used as example)

Unroll and layout canopy at exact position of desired finished assembly. Ensure canopy site is clear of sharp objects that could damage the canopy.

Assemble side poles and lay straight out from each pole hole in canopy. Drive a stake 1' from the end of each pole. The stake must be driven through the ring attached to each guy rope or, wrap the rope around stake and tighten using plastic clips.



CANOPY INSTRUCTIONS



2 RAISE SIDE POLES

Start at opposite corners. Insert side poles into pole holes and raise so that bottom of pole slant toward center of canopy.

Continue with other two corners and then sides.



3 RAISE CENTRE POLE

Assemble three-piece center pole and insert into center pole hole.

Raised to upright position and tie off jump rope to pole.



4 SIDE POLE ADJUSTMENT

Tighten guy ropes and then set side poles to upright position. Adjust pole positions and guy rope tension to properly pull out canopy.



5 TAKE DOWN

Loosen all guy ropes.
Reverse steps 1 through 4 for disassembly.

IMPORTANT: Check guy ropes periodically for tightness and maintaining of good condition. Stakes provided are for average soil conditions. Sandy soil or asphalt may require additional staking. Proper installation suitable to site conditions is the responsibility of the installer. Store canopy in a cool, dry area. Never store while wet or damp.